

A1 50. Enzyme component system (ECS) as an oxidation and bleaching system for the preparation of special highly selective oxidants, consisting of

a) system component 1): at least one hydrolase from enzyme classes 3.1, 3.1.1, 3.1.2, 3.1.3, 3.1.4, or 3.1.7 and/or at least one hydrolase from enzyme classes 3.5, 3.5.1, 3.5.2, 3.5.3, 3.5.4, 3.5.5 or 3.5.99,

b) system component 2): at least one fatty acid, preferably C<sub>6</sub> to C<sub>26</sub> (saturated, monounsaturated or polyunsaturated),

c) system component 3): at least one oxidant precursor for reaction with the enzymes,

d) system component 4): at least one ketone from the group of carbonyl compounds.

51. Enzyme component system according to claim 50, characterized in that enzymes of class 3.1.1.3 lipases (triacylglycerol lipase, triglyceroacyl hydrolases) are used as system component 1).

52. Enzyme component system according to claim 50, characterized in that enzymes of class 3.5.1.4, amidases, and/or class 3.5.5.1, nitrilases, are used as system component 1).

53. Enzyme component system according to claim 50, characterized in that the enzymes of class 3.1.1.3 (lipases) are obtained from organisms such as *Candida antarctica*, *Candida rugosa*, *Candida lipolytica*, *Candida cylindraceae*, *Candida spec.*, *Geotrichum candidum*, *Humicola lanuginosa*, *Penicillium cambertii*, *Penicillium roquefortii*, *Aspergillus spec.*, *Mucor javanicus*, *Mucor mehei*, *Rhizopus arrhizus*, *Rhizopus niveus*, *Rhizopus delamar*, *Rhizopus spec.*, *Chromobacterium viscosum*, *Pseudomonas cepacia* and *Pseudomonas spec.* from wheat seedlings or pancreas (pig or other sources) and from other sources.

54. Enzyme component system according to claim 50, characterized in that the enzymes of classes 3.5.1.4 and 3.5.5.1 are obtained from organisms such as *Pseudomonas aeruginosa*, *Pseudomonas putida*, *Pseudomonas acidovorax*, *Pseudomonas spec.*, *Aspergillus nidulans*, *Aspergillus spec.*, *Brevibacterium spec.*, *Streptococcus pneumoniae*, *Rhodococcus spec.* and others.

55. Enzyme component system according to claim 50, characterized in that it contains enzymes from fungi, bacteria, animals or plants obtained from natural organisms or organisms modified by genetic engineering.

56. Enzyme component system according to claim 50, characterized in that modified enzymes, enzyme constituents, prosthetic groups or mimicking substances are used as catalysts.

Cont  
A'  
57. Enzyme component system according to claims 50, characterized in that it contains as system component 2) one or more saturated, monounsaturated or polyunsaturated, preferably C<sub>6</sub> to C<sub>26</sub> fatty acids according to Appendix 1.

58. Enzyme component system according to claim 57, characterized in that it contains as system component 2) preferably tetradecanoic acid (myristic acid) and/or dodecanoic acid (lauric acid).

B.I.  
Cont  
59. Enzyme component system according to claim 50, characterized in that it contains as system component 3) at least one oxidant precursor such as peroxide (H<sub>2</sub>O<sub>2</sub>), an organic peroxide such as 3-chloroperoxybenzoic acid, Mg monoperoxyphthalate, ditert.butyl peroxide, cumene hydroperoxide, lauroyl peroxide, chloroperoxybenzoic acid, dicumyl hydroperoxide, methyl ethyl ketone peroxide, benzoyl peroxide, diperoxydodecanedioic acid Na salt and others and a per-compound such as a perborate, persulfate, percarbonate, perphosphate, percarbamide, perchlorate etc.

60. Enzyme component system according to claim 50, characterized in that it contains as system component 3) the H<sub>2</sub>O<sub>2</sub>-activating ions Mo<sup>6+</sup>, W<sup>6+</sup>, Va<sup>5+</sup> and/or compounds such as the nitrilamines and/or dicyandiamines.

61. Enzyme component system according to claim 50, characterized in that it preferably contains H<sub>2</sub>O<sub>2</sub>, as system component 3).

62. Enzyme component system according to claim 50, characterized in that it contains as system component 3)  $\text{H}_2\text{O}_2$  generated in situ from glucose and GOD.


Cont  
A1

63. Enzyme component system according to claim 59, characterized in that it contains as system component 3) besides per-compounds also a bleaching activator such as TAED (tetraacetythylenediamine), TAGU (tetraacetylglucuril) and iso-NOBS (sodium p-Isononanoyloxy- benzenesulfonate).

B11  
Cont

64. Enzyme component system according to claim 50, characterized in that it contains as system component 3) besides the peroxides and/or per-compounds also air or oxygen at atmospheric pressure at a slightly positive pressure of up to 2 bar.


65. Enzyme component system according to claims 50, characterized in that it contains as system component 4) at least one ketone of general formula I:



The  $\text{R}^1$  and  $\text{R}^2$  groups can be equal or different and denote aliphatic or aromatic groups.

Moreover, the  $\text{R}^1$  and  $\text{R}^2$  groups can form a ring containing besides carbon also heteroatoms such as nitrogen, oxygen and sulfur.

66. Enzyme component system according to claim 50, characterized in that it contains as system component 4) a 1,2-diketone of formula II, a 1,3-diketone of formula III or a polyketone (polyketide) as well as a tautomeric enol of formula IV

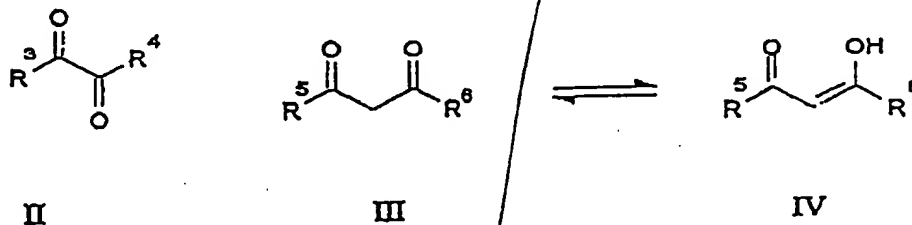

wherein the  $R^3$  to  $R^6$  groups, once again, can be equal or different and denote aliphatic or aromatic groups. Moreover, groups  $R^3$  and  $R^4$  and groups  $R^5$  and  $R^6$ , together, can form a ring containing besides carbon also heteroatoms such as nitrogen, oxygen or sulfur.

67. Enzyme component system according to claim 50, characterized in that it contains as system component 4) besides a general carbonyl compound also a ketone such as, in general, a hydroxyketone,  $\alpha,\beta$ -unsaturated ketone oxydicarboxylic acid, quinone and halogenated ketone.

68. Enzyme component system according to claim 50, characterized in that it contains as system component 4) a compound such as those listed in Appendix 2.

69. Enzyme component system according to claim 50, characterized in that it contains a polymerization catalyst such as, in particular, a phenolic substance or polycyclic compound with several oxidizable hydroxyl groups according to Appendix 3.

70. Enzyme component system according to claim 50, characterized in that it is possible to add to it as an additional system an enzymatic oxidation system with enzyme action- enhancing compounds, said system containing

- Cont  
A1
- a) at least one suitable oxidation catalyst
  - b) at least one suitable oxidant
  - c) at least one mediator selected from the group consisting of hydroxylamines, hydroxylamine derivatives, hydroxamic acids, hydroxamic acid derivatives, aliphatic, cycloaliphatic, heterocyclic or aromatic compounds containing at least one N-hydroxy, oxime, N-oxy or N,N'-dioxy function and/or at least one mediator from the group of amides, such as, for example, hydrazides or 1,2,4-triazolidin- 3,5-diones (urazoles) and/or at least one mediator from the group of imides such as, for example, the hydantoins, and/or at least one mediator from the group of oxocarbons.
- B1  
cont

71. Enzyme component system according to claim 50, characterized in that it is possible to add to it as an additional system an enzymatic oxidation system with enzyme action- enhancing compounds, said system containing:

at least one mediation enhancer selected from the group consisting of carbonyl compounds, aliphatic ethers, phenol ethers or olefins (alkenes) and/or at least one mediation enhancer selected from the group consisting of NO-, NOH- and HRN-OH compounds and/or amides such as hydrazides or urazoles and/or imides such as hydantoins and/or oxocarbons.

72. Enzyme component system according to claim 50, characterized in that it is possible to add to it as an additional system an enzymatic oxidation system with enzyme action-enhancing compounds, said system containing:

at least one mediation enhancer selected from the group consisting of cation radical-generating substances, of the phenothiazine and/or phenoxazine type and/or of the (R=N-N=R) type (for example, ABTS) or of aryl-substituted alcohols (nonphenols) such as, for example, veratryl alcohol and/or phenol derivatives, such as p-hydroxycinnamic acid, 2,4-dichlorophenol, p-hydroxy-benzenesulfonate, vanillin (4-hydroxy-3-methoxybenzaldehyde), p-hydroxybenzoic acid, 5-amino-2-hydroxybenzoic acid (5-aminosalicylic acid) and/or Wurster-type radical cation compounds, such as p-phenylenediamine, preferably N,N-dimethyl-p-phenylenediamine, N,N-diethyl-p-phenylenediamine, N,N,N',N'-tetramethyl-p-phenylenediamine, 2,3,5,6-tetramethyl-p-phenylenediamine and/or radical anions, for example semiquinones, which can be generated by enzymatic oxidation of hydroquinones.

73. Enzyme component system according to claim 50, characterized in that it is possible to use as oxidation catalysts enzymes such as the oxidoreductases of classes 1.1.1. to 1.97, and preferably:

cellobiose: oxygen-l-oxidoreductase (cellobiose oxidase) (1.1.3.25),

cellobiose: quinone-l-oxidoreductase (1.1.5.1), bilirubin oxidase (1.3.3.5), cytochrome oxidase (1.9.3), oxygenases, lipoxygenases (1.13, 1.14),

superoxide dismutase (1.15.11), ferrioxidase, for example ceruloplasmin (1.16.3.1),

1.10 such as catechol oxidase (tyrosinase) (1.10.3.1), L-ascorbate oxidase (1.10.3.3),

Cont  
A7  
O-aminophenol oxidase (1.10.3.4) and laccase (benzodiol:oxygen oxidoreductase) (1.10.3.2),  
1.11 such as cytochrome C peroxidase (1.11.1.5), catalase (1.11.1.6), peroxidase (1.11.1.7),  
iodide peroxidase (1.11.1.8), glutathione peroxidase (1.11.1.9), chloride peroxidase (1.11.1.10)  
and L- ascorbate peroxidase (1.11.1.11), phospholipid hydroperoxide glutathione peroxidase (1.  
11.1.12), manganese peroxidase (1.11.1.13) and diarylpropane peroxidase (ligninase, lignin  
peroxidase) (1.11.1.14).

74. Enzyme component system according to claim 50, characterized in that enzymes such as  
laccases and/or peroxidases are preferably used as oxidation catalysts.

B1  
cont  
75. Enzyme component system according to claim 74, characterized in that it preferably  
contains laccases and/or peroxidases from white rotting fungi such as, for example, Trametes  
versicolor, Trametes spec., Phlebia spec., Pleurotus spec., Phanerochaete chrysosporium,  
Agaricus spec. etc. and also other fungi, bacteria, plant and animal cells obtained from natural  
organisms or organisms modified by genetic engineering.

76. Enzyme component system according to claim 50, characterized in that modified  
enzymes, enzyme constituents, prosthetic groups or mimicking substances are used as the  
enzyme catalysts.

77. Enzyme component system according to claim 70, characterized in that it employs as  
additional oxidants preferably air, oxygen, ozone, a peroxide such as  $H_2O_2$ , an organic peroxide,  
a peracid such as peracetic, performic, persulfuric, pernitric, metachloroperoxybenzoic and



perchloric acid, a per-compound such as a perborate, percarbonate and persulfate, or oxygen species and the radicals thereof such as the OH, OOH and OH<sup>+</sup> radical, superoxide (O<sub>2</sub><sup>-</sup>), dioxygenyl cation (O<sub>2</sub><sup>+</sup>), singlet oxygen, ozonide (O<sub>3</sub><sup>-</sup>), dioxiranes, dioxitanes or Fremy radicals.

78. Enzyme component system according to claim 70, characterized in that the mediators and additional mediation enhancers are those shown in Appendix IV and IVa.

79. Enzyme component system according to claim 70, characterized in that the mediator/mediation enhancer ratio is from 5000:1 to 5:1 and preferably from 500:1 to 5:1.

80. Use of the enzyme component system according to claim 50 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulp) and deinked pulps, in the treatment of paper production wastewater (grinder wastewater, TMP wastewater) and of wastewater from other branches of the industry, such as wood pulp wastewater and textile production wastewater, among others, for the production of lignin solutions or gels and of the corresponding binders/adhesives, and for the production of wood-based composites, in a process for the enzymatic printing ink removal during the deinking of waste paper, as an oxidation system in organic synthesis, in a process for the enzymatic liquefaction of coal, in a process for detergent bleaching, and in a process for bleaching and/or decolorizing textile fabrics.

81. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or

Capit  
A1  
7  
B1  
Cont

annual plants and of high yield wood pulps (groundwood and refiner pulp) and deinked pulps, whereby the reaction of the enzyme component system is carried out at a pH from 2 to 11, preferably at pH 3 to 9, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, at a pulp consistency from 0.5 to 40%, preferably from 4 to 15%, in the presence of oxygen or air at atmospheric pressure or a slightly positive pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa*, is used at a concentration from 0.05 to 5 mg, preferably from 0.05 to 2 mg, and amidase from *Pseudomonas aeruginosa* is used at a concentration from 40 to 200 IU, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic and/or dodecanoic acid, are used at a concentration from 0.05 to 20 mg, preferably from 0.05 to 10 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 20 mg (100%), preferably from 0.05 to 10 mg, and system component 4, namely a ketone, preferably benzophenone, is used at a concentration from 0.05 to 20 mg, preferably at a concentration from 0.05 to 10 mg, in each case based on 1 g of absolutely dry pulp.

82. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulps) and deinked pulps, whereby an acid wash or a Q-step is used before and/or after the reaction of the enzyme component system and the acid wash is carried out at 60-120 °C, at pH 2 to 5.5, for 30-90 min and at 4-20% pulp consistency, and the Q-step is carried out with 0.05-1 %, preferably with 0.2 to 0.5% of chelator at 60-100 °C, at pH 2 to 5.5 for 30-90 min and at a pulp consistency of 4-20%.

83. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulps) and deinked pulps, whereby the acid wash and the Q-step are carried out for 1 hour at 60- 90 °C, at pH 2 to 5 and at 10% pulp consistency.

84. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (ground wood and refiner pulps) and deinked pulps, whereby said system can be used before or after any possible treatment of the pulp by single or multiple digestion, bleaching steps or other pre- and post-treatments, such as alkaline leaching, alkaline extraction, washing, acid treatment, Q-step, O<sub>2</sub>-delignification step, peroxide bleaching step, O<sub>2</sub>-promoted peroxide step, pressurized peroxide step, peracid step, peracid- promoted O<sub>2</sub> or peroxide step, ozone bleaching step, dioxirane step, polymethoxalate step, Cl<sub>2</sub>-delignification step, ClO<sub>2</sub>- bleaching step, Cl<sub>2</sub> /ClO<sub>2</sub>- bleaching step, reductive bleaching steps, sulfonation steps, NO/NO<sub>2</sub> treatments, nitrosylsulfuric acid treatment, swelling steps, enzyme treatments, for example treatments with hydrolases such as cellulases and/or hemicellulases (for example, xylanase, mannase, etc.) and/or pectinases and/or proteinases and/or lipases and/or amidases and/or oxidoreductases, such as, for example, laccases and/or peroxidases etc. or several combined treatments.

Cont  
A1

85. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and high yield wood pulps (groundwood and refiner pulps) and deinked pulps, whereby the swelling step is carried out with the aid of substances such as, for example, glycols, such as propylene glycol or ethylene glycol, glycol ethers such as ethylene glycol dimethyl ether etc., but also with the aid of solvents, for example, alcohols such as methanol, ethanol, butanol, amyl alcohol, cyclohexanol, benzyl alcohol and chlorohydrin, phenols such as phenol, methylphenols and methoxyphenols, aldehydes such as formaldehyde and chloral, mercaptans such as butyl mercaptan, benzyl mercaptan and thioglycolic acid, organic acids such as formic, acetic and chloroacetic acid, amines such as ammonia and hydrazine, hydrotropic solvents, for example a concentrated solution of sodium benzoate, other substances such as benzenes, pyridines, dioxane, ethyl acetate, and other basic solvents such as OH-/H<sub>2</sub>O or OH-/alcohol etc.

Bl  
Cont

86. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulps) and deinked pulps, whereby there is added to the reaction solution a complexing agent such as ethylenediaminetetraacetic acid (EDTA), diethylenetriaminepentaacetic acid (DTPA), hydroxyethylenediaminetriacetic acid (HEDTA), diethylenetriaminopentamethylenephosphonic acid (DTMPA), nitrilotriacetic acid (NTA), polyphosphoric acid (PPA) or other complexing agents for iron, manganese or copper, for example diethylamine or hydroxylamine.

Cor 4  
A/  
87. Use of the enzyme component system according to claim 80 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulps) and deinked pulps, said process being carried out in several steps and whereby between each step is applied a washing or washing and extraction step with alkaline hydroxide solution, or neither washing nor extraction takes place.

B/  
Cont  
88. Use of the enzyme component system according to claim 80 in the treatment of paper production wastewater (grinder wastewater, TMP wastewater) and of wastewater from other branches of the industry, such as wood pulp wastewater and textile production wastewater, among others, whereby the reaction of the enzyme component system is carried out at pH 2 to 11, preferably 3 to 6, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, in the presence of oxygen or air at atmospheric pressure or slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Aspergillus spec.* is used at a concentration from 0.05 to 50 mg, preferably from 0.5 to 10 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic acid and/or dodecanoic acid, is used at a concentration from 0.05 to 200 mg, preferably at a concentration from 0.05 to 50 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 200 mg (100%), preferably at a concentration from 0.05 to 50 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 0.05 to 200 mg, preferably at a concentration from 0.05 to 50 mg, and that a polymerization catalyst, preferably purpurogallin, is used at a concentration from 0.005 to 200 mg, preferably at

a concentration from 0.005 to 50 mg, the concentrations in all cases being based on 1 liter of wastewater.

89. Use of the enzyme component system according to claim 80 for the production of lignin solutions or gels and of the corresponding binders/adhesives, and for the production of wood-based composites, whereby the reaction of the enzyme component system is carried out at pH 2 to 11, preferably 3 to 6, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, in the presence of oxygen or air at atmospheric pressure or slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa* is used at a concentration from 0.05 to 50 mg, preferably from 0.5 to 10 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic acid and/or dodecanoic acid, is used at a concentration from 0.05 to 200 mg, preferably at a concentration from 0.05 to 50 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 200 mg (100%), preferably at a concentration from 0.05 to 50 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 0.05 to 200 mg, preferably at a concentration from 0.05 to 50 mg, and that a polymerization catalyst, preferably purpurogallin, is used at a concentration from 0.005 to 200 mg, preferably at a concentration from 0.005 to 50 mg, the concentrations in all cases being based on 1 liter of wastewater.

90. Use of the enzyme component system according to claim 80 in a process for the enzymatic printing ink removal during the deinking of waste paper, whereby the reaction of the enzyme component system is carried out at pH 7 to 11, preferably at pH 7 to 9, at a temperature

Cont  
A1

from 20 to 95 °C, preferably from 40 to 95 °C, in the presence of oxygen or air at atmospheric pressure or slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa*, is used at a concentration from 5 to 500 mg, preferably from 5 to 100 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic acid and/or dodecanoic acid, is used at a concentration from 5 to 2000 mg, preferably at a concentration from 5 to 500 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub> is used at a concentration from 5 to 5000 mg (100%), preferably at a concentration from 5 to 1000 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 5 to 2000 mg, preferably at a concentration from 5 to 500 mg, and that, to change the optimum pH for the printing ink removal reaction and to affect the swelling behavior of the waste paper, a phenolic or polycyclic substance with several oxidizable hydroxyl groups, preferably bisphenol A, is used at a concentration from 1 to 2000 mg and from 1 to 500 mg, in each case based on 1 kg of air-dried waste paper.

B1  
cont

91. Use of the enzyme component system according to claim 80 in a process for the enzymatic printing ink removal during the deinking of waste paper, whereby a reducing agent such as sodium bisulfite, sodium dithionite, ascorbic acid, a thiol compound, mercapto compound or glutathione, but preferably sodium bisulfite and/or sodium dithionite, is added at a concentration from 0.1 to 1000 mg per kg of air-dried waste paper and preferably at a concentration from 0.1 to 200 mg per kg of waste paper.

92. Use of the enzyme component system according to claim 80 in a process for the enzymatic printing ink removal during the deinking of waste paper, whereby, to collect the printing ink particles and to produce foam during flotation, a commercial collector, preferably of the Incopur brand, for example Incopur RSGA, is used at a concentration from 1 to 5000 mg per kg of air-dried waste paper and preferably from 1 to 1000 mg per kg of waste paper.

93. Use of the enzyme component system according to claim 80 in a process for the enzymatic printing ink removal during the deinking of waste paper, whereby additional enzymes such as cellulases and/or hemicellulases such as xylanase and/or mannase and/or pectinases and/or oxidoreductases are added.

94. Use of the enzyme component system according to claim 80 as an oxidation system in organic synthesis, whereby the reaction of the enzyme component system is carried out at pH 2 to 11, preferably pH 3 to 6, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, in the presence of oxygen or air at atmospheric pressure or slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa* is used at a concentration from 0.05 to 5 mg, preferably from 0.05 to 3 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub>, fatty acids, preferably tetradecanoic acid and/or dodecanoic acid, is used at a concentration from 0.05 to 100 mg, preferably at a concentration from 0.05 to 30 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub> is used at a concentration from 0.05 to 100 mg (100%), preferably at a concentration from 0.05 to 30 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration



from 0.05 to 100 mg, preferably at a concentration from 0.05 to 30 mg, the concentrations in all cases being based on 10 mmoles of substrate.

Cont  
A1  
95. Use of the enzyme component system according to claim 80 as an oxidation system in organic synthesis, whereby, for example, an aromatic alcohol or an aromatic methyl compound is used as the substrate for the oxidation reaction according to the invention.

B1  
cont  
96. Use of the enzyme component system according to claim 80 in a process for the enzymatic liquefaction of coal, whereby the reaction of the enzyme component system is carried out at a pH from 2 to 11, preferably at pH 3 to 9, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, at a coal slurry consistency from 0.5 to 40%, preferably from 4 to 15%, in the presence of oxygen or air at atmospheric pressure or a slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa* is used at a concentration from 0.05 to 20 mg, preferably from 0.05 to 10 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic and/or dodecanoic acid, is used at a concentration from 0.05 to 100 mg, preferably from 0.05 to 50 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 50 mg (100%), preferably from 0.05 to 50 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 0.05 to 100 mg, preferably at a concentration from 0.05 to 50 mg, in each case based on 1 g of coal (lignite).

97. Use of the enzyme component system according to claim 80 in a process for detergent bleaching, whereby the reaction of the enzyme component system is carried out at a pH from 2 to

12, preferably at pH 3 to 10, at a temperature from 20 to 95 °C, preferably from 30 to 95 °C, in the presence of oxygen or air at atmospheric pressure or at a slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa*, is used at a concentration from 0.05 to 20 mg, preferably from 0.05 to 10 mg, and system component 2, namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic and/or dodecanoic acid, is used at a concentration from 0.05 to 50 mg, preferably at a concentration from 0.05 to 20 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 50 mg (100%), preferably at a concentration from 0.05 to 20 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 0.05 to 50 mg, preferably at a concentration from 0.05 to 20 mg, in each case based on 100 mL of washing solution.

98. Use of the enzyme component system according to claim 80 in a process for detergent bleaching, whereby the system is added to a detergent formulation with all its technically common and known deterative substances or detergent additives.

99. Use of the enzyme component system according to claim 80 in a process for bleaching and/or decolorizing textile fabrics, whereby the reaction of the enzyme component system is carried out at a pH from 2 to 11, preferably at pH 3 to 9, at a temperature from 20 to 95 °C, preferably from 40 to 95 °C, at a fabric density from 0.5 to 40% and preferably from 4 to 15%, in the presence of oxygen or air at atmospheric pressure or at a slightly positive O<sub>2</sub> pressure (up to 2 bar), and system component 1, namely lipase from *Humicola lanuginosa* is used at a concentration from 0.05 to 10 mg, preferably from 0.05 to 5 mg, and system component 2,

Cont  
A1  
B1  
cont.

namely one or more fatty acids, preferably C<sub>8</sub> to C<sub>16</sub> fatty acids, preferably tetradecanoic and/or dodecanoic acid, is used at a concentration from 0.05 to 20 mg, preferably from 0.05 to 10 mg, and system component 3, namely the oxidant precursor, preferably H<sub>2</sub>O<sub>2</sub>, is used at a concentration from 0.05 to 20 mg (100%), preferably at a concentration from 0.05 to 10 mg, and system component 4, namely a ketone, preferably a benzophenone, is used at a concentration from 0.05 to 20 mg, preferably at a concentration from 0.05 to 10 mg, in each case based on 1 g of denim.

100. Use of the enzyme component system according to claim 50 in a process for the delignification and/or modification and/or bleaching of cellulose/wood pulp from wood or annual plants and of high yield wood pulps (groundwood and refiner pulp) and deinked pulps, in the treatment of paper production wastewater (grinder wastewater, TMP wastewater) and of wastewater from other branches of the industry, such as wood pulp wastewater and textile production wastewater, among others, for the production of lignin solutions or gels and of the corresponding binders/adhesives, and for the production of wood-based composites, in a process for the enzymatic printing ink removal during the deinking of waste paper, as an oxidation system in organic synthesis, in a process for the enzymatic liquefaction of coal, in a process for detergent bleaching, and in a process for bleaching and/or decolorizing textile fabrics.--

#### REMARKS

Applicant has canceled claims 1-49 without prejudice or disclaimer. Applicant has added new claims 50-100. No new matter has been added. The new claims are supported by the specification.